


## Dialogic® D/240JCT-T1 Media Board and Dialogic® D/300JCT-E1 Media Board

The Dialogic® D/240JCT-T1 Media Board is a 24-port Digital T1 PCI Express board and the Dialogic® D/300JCT-E1 Media Board is a 30-port Digital E1 PCI Express board. Both of these boards are well-suited for developing advanced communications applications requiring digital network interfaces as well as multimedia resources. These high performance, scalable products support voice, fax, and software-based speech recognition processing in a single PCI Express slot.

Dialogic® JCT Media Boards – including these models - can be used by developers to provide small- and medium-sized enterprise Computer Telephony (CT) applications that require high-performance voice and fax processing. Among the features and benefits of these boards, and other Dialogic® JCT Media Boards, are the following. They have On-board Digital Signal Processor (DSP) based voice processing technology and they are well-suited for server-based CT systems under Windows and Linux. They also provide a powerful platform for creating sophisticated Interactive Voice Response (IVR) applications for the small and medium-sized enterprise market segment. Features such as fax and software-based speech recognition processing enable unified messaging applications. They also provide Automatic Gain Control (AGC), so even a weak telephone signal can be recorded and replayed with clarity.

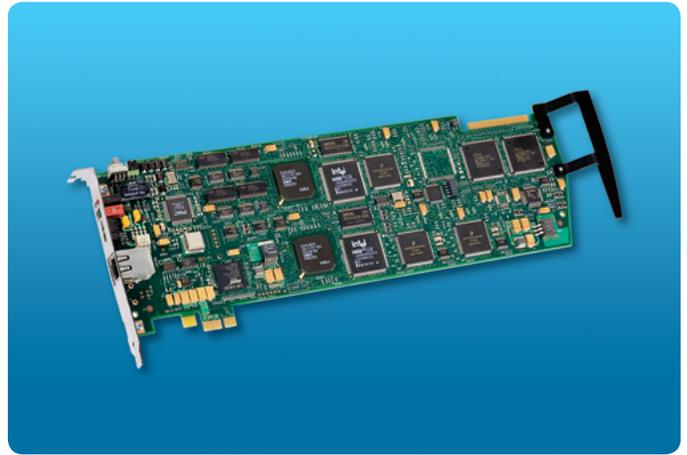

Features	Benefits
<b>24 or 30 independent voice channels in a single PCI Express H.100 slot</b>	Lower costs while creating larger high-density systems with fewer boards per chassis
<b>Supports G.726 bit exact and GSM coders</b>	Enables implementation of unified messaging applications that meet VPIM standards
<b>Silence-compressed recording</b>	Eliminates silence and preserves hard disk space
<b>Unified call control access through Dialogic® Global Call Software interface</b>	Provides worldwide application portability and shortens development time by using the same API for almost any network protocol
<b>Available with PCI Express edge connector</b>	PCI Express form factor compatible with x1 slot (x1 or higher compatible).
<b>Supports DSP-based onboard fax and host-based speech recognition (fax and host-based speech recognition are mutually exclusive)</b>	Maximizes the number of boards in the system

# Dialogic® D/240JCT-T1 Media Board and Dialogic® D/300JCT-E1 Media Board

## Technical Specifications

### D/240JCT-T1

Number of ports	24
Maximum boards per system	16. Number may be limited by factors including application, system performance, and the number of CT Bus loads per board
CT Bus loads per board	1.5
Maximum CT Bus loads per system	20
Digital network interface	Onboard DSX-1 interface
Resource sharing bus	H.100 CT Bus
Control microprocessors	2 Intel486 GX processors
Digital signal processor	Freescale DSP56303 @ 100 MHz, with 128Kx24 private
Supported operating systems	Windows; Linux. Details at <a href="http://www.dialogic.com/systemreleases">www.dialogic.com/systemreleases</a>
CSP	Yes
Signaling	Digital ISDN PRI (CAS)

### Host Interface

Bus compatibility	Complies with PCI-SIG PCI Express Base Specification, Rev. 1.0a; x1 or higher compatible
Bus speed	2.5 GHz maximum per direction
Shared memory	32 KB to 64 KB page
Interrupt	Legacy INTA emulation shared by Dialogic® JCT PCIe Media Boards
I/O ports	None

### Physical Dimensions

Standard-height, full-length form factor
12.283 in. (31.200 cm) long
0.79 in. (2.007 cm) wide
3.87 in. (9.830 cm) high (excluding edge connector)

### Power Requirements

+3.3 VDC	2.39 A maximum
+12 VDC	0.55 A maximum

### Environmental Requirements

Operating temperature	+32°F (0°C) to +104°F (+40°C)
Storage temperature	-4°F (-20°C) to 158°F (+70°C)
Humidity	8% to 80% noncondensing

### Telephone Interface

Clock rate	1.544 Mb/s ±32 ppm
Level	3.0 V (nominal)
Pulse width	323.85 ns (nominal)
Line impedance	100 Ohm ±10%
Other electrical characteristics	Complies with AT&T TR62411 and ANSI T1.403-1989
Framing	SF (D3/D4) ESF for ISDN
Line coding	AMI AMI with B7 stuffing B8ZS
Clock and data recovery	Complies with AT&T TR62411 and Telcordia TA-TSY-000170
Jitter tolerance	Complies with AT&T TR62411 and ANSI T1.403-1989

# Dialogic® D/240JCT-T1 Media Board and Dialogic® D/300JCT-E1 Media Board

Connectors	RJ-48C
Telephony bus connector	H.100-style 68-pin fine pitch card edge connector
Loopback	Supports switch-selectable local analog loopback and software selectable local digital loopback

## Reliability

Estimated MTBF	Per Telcordia Method 1 150,000 hours
----------------	---

## D/300JCT-E1

Number of ports	30
Maximum boards per system	16. Number may be limited by factors including application, system performance, and the number of CT Bus loads per board
CT Bus loads per board	1.5
Maximum CT Bus loads per system	20
Digital network interface	Onboard E-1 interface
Resource sharing bus	H.100 CT Bus
Control microprocessors	2 Intel486 GX processors
Digital signal processors	Freescale DSP56303 @ 100 MHz, with 128Kx24 private
Supported operating systems	Windows; Linux. Details at <a href="http://www.dialogic.com/systemreleases">www.dialogic.com/systemreleases</a>
CSP	No
Signaling	R2MF

## Host Interface

Bus compatibility	Complies with PCI-SIG PCI Express Base Specification, Rev. 1.0a; x1 or higher compatible
Bus speed	2.5 GHz maximum per direction
Bus mode	x1 lane configuration (x1 or higher compatible)
Shared memory	32 KB to 64 KB page
Interrupt	Legacy INTA emulation shared by Dialogic® JCT PCIe Media Boards
I/O ports	None

## Physical Dimensions

Standard-height, full-length form factor
12.283 in. (31.200 cm) long
0.79 in. (2.007 cm) wide
3.87 in. (9.830 cm) high (excluding edge connector)

## Power Requirements

+3.3 VDC	2.73 A maximum
+12 VDC	0.55 A maximum

## Environmental Requirements

Operating temperature	+32°F (0°C) to +104°F (+40°C)
Storage temperature	-4°F (-20°C) to 158°F (+70°C)
Humidity	8% to 80% noncondensing

## Telephone Interface

Network clock rate	2.048 Mb/s ±50 ppm
Internal clock rate	2.048 Mb/s ±32 ppm
Level	2.37 V (nominal) for 75 Ohm lines 3.0 V (nominal) for 120 Ohm lines
Pulse width	244 ns (nominal)
Line impedances	75 Ohm, unbalanced 120 Ohm, balanced

# Dialogic® D/240JCT-T1 Media Board and Dialogic® D/300JCT-E1 Media Board

Other electrical characteristics	Complies with ITU-T Rec. G.703
Framing	ITU-T G.704-1988 with CRC4
Line coding	HDB3
Clock and data recovery	Complies with ITU-T Rec. G.823-1988
Jitter tolerance	Complies with ITU-T Rec. G.823, G.737, G.739, G.742-1988
Connectors	BNC for 75 Ohm lines RJ-48C for 120 Ohm lines
Telephony bus connector	H.100-style 68-pin fine pitch card edge connector
Loopback	Supports switch-selectable local analog loopback and software selectable local digital loopback

## Reliability

Estimated MTBF	Per Telcordia Method 1 150,000 hours
----------------	---

## Approvals, Compliance and Warranty

Environmental Information	<a href="http://www.dialogic.com/en/company/environmental-policy.aspx">www.dialogic.com/en/company/environmental-policy.aspx</a>
Country-specific safety and telecom approvals	<a href="http://www.dialogic.com/en/products/others/declarations.aspx">www.dialogic.com/en/products/others/declarations.aspx</a>
Warranty information	<a href="http://www.dialogic.com/en/warranties.aspx">www.dialogic.com/en/warranties.aspx</a>

## Springware/JCT Technical Specifications

### Facsimile

Fax compatibility	ITU-T G3 compliant (T.4, T.30) ETSI NET/30 compliant
Data rate	14,400 b/s (v.17) send 9600 b/s receive
Variable speed selection	Automatic step-down to 12,000 b/s, 9600 b/s, 7200 b/s, 4800 b/s, and lower
Transmit data modes	Modified Huffman (MH) Modified Read (MR)
Receive data modes	MH, MR
File data formats	Tagged Image File Format-Fax (TIFF-F) for transmit/receive MH and MR
ASCII-to-fax conversion	Host-PC-based conversion Direct transmission of text files Windows fonts supported Page headers generated automatically
Error correction	Detection, reporting, and correction of faulty scan lines
Image widths	1728 pixels 2048 pixels 2432 pixels
Image scaling	Automatic horizontal and vertical scaling between page sizes
Polling modes	Normal Turnaround
Image resolution	Normal (203 pels/in. x 98 lines/in.; 203 pels/2.54 cm x 98 lines/2.54 cm) Fine (203 pels/in. x 196 lines/in.; 203 pels/2.54 cm x 196 lines/2.54 cm)
Fill minimization	Automatic fill bit insertion and stripping

### Audio Signal

Receive range	(T-1) -40 to +2.5 dBm0 nominal, configurable by parameter** (E-1) -43 to +2.5 dBm0 nominal, configurable by parameter**
Automatic gain control	Application can enable/disable Above -18 dBm0 (T-1) or -21 dBm0 (E-1) results in full-scale recording, configurable by parameter**
Silence detection	-38 dBm0 nominal, software adjustable**

# Dialogic® D/240JCT-T1 Media Board and Dialogic® D/300JCT-E1 Media Board

Transmit level (weighted average)	(T-1) -9 dBm0 nominal, configurable by parameter** (E-1) -12.5 dBm0 nominal, configurable by parameter**
Transmit volume control	40 dB adjustment range, with application-definable increments and legal limit cap
<b>Frequency Response</b>	
24 kbit/s	300 Hz to 2600 Hz ±3 dB
32 kbit/s	300 Hz to 3400 Hz ±3 dB
48 kbit/s	300 Hz to 2600 Hz ±3 dB
64 kbit/s	300 Hz to 3400 Hz ±3 dB
<b>Audio Digitizing</b>	
13 kbit/s	GSM @ 8 kHz sampling
24 kbit/s	OKI ADPCM @ 6 kHz sampling
32 kbit/s	OKI ADPCM @ 8 kHz sampling
32 kbit/s	G.726 @ 8 kHz sampling
48 kbit/s	A-law G.711 PCM @ 6 kHz sampling
48 kbit/s	μ-law G.711 PCM @ 6 kHz sampling
64 kbit/s	A-law G.711 PCM @ 8 kHz sampling
64 kbit/s	μ-law G.711 PCM @ 8 kHz sampling
Digitization selection	Selectable by application on function call-by-call basis
Playback speed control	Pitch controlled Available on OKI ADPCM and G.711 PCM Adjustment range: ±50% Adjustable through application or programmable DTMF control
<b>DTMF Tone Detection</b>	
DTMF digits	0 to 9, *, #, A, B, C, D per Telcordia LSSGR Sec 6
Dynamic range	(T-1) -36 dBm0 to -3 dBm0 per tone, configurable by parameter** (E-1) -39 dBm0 to 0 dBm0 per tone, configurable by parameter**
Minimum tone duration	40 ms, can be increased with software configuration
Interdigit timing	Detects like digits with a >40 ms interdigit delay Detects different digits with a 0 ms interdigit delay
Acceptable twist and frequency variation	(T-1) Meets Telcordia LSSGR Sec 6 and EIA 464 requirements (E-1) Meets appropriate ITU-T specifications**
Noise tolerance	Meets Telcordia LSSGR Sec 6 and EIA 464 requirements for Gaussian, impulse, and power line noise tolerance
Cut-through	(T-1) Local echo cancellation permits 100% detection with a >4.5 dB return loss line (E-1) Digital trunks use separate transmit and receive paths to network Performance dependent on far-end handset's match to local analog loop
Talk-off	Detects less than 20 digits while monitoring Telcordia TR-TSY-000763 standard speech tapes (LSSGR requirements specify detecting no more than 470 total digits) Detects 0 digits while monitoring MITEL speech tape #CM 7291
<b>Global Tone Detection</b>	
Tone type	Programmable for single or dual
Maximum number of tones	Application-dependent
Frequency range	Programmable within 300 Hz to 3500 Hz
Maximum frequency deviation	Programmable in 5 Hz increments
Frequency resolution	±5 Hz. Separation of dual frequency tones is limited to 62.5 Hz at a signal-to-noise ratio of 20 dB
Timing	Programmable cadence qualifier, in 10 ms increments
Dynamic range	(T-1) Programmable, default set at -36 dBm0 to -0 dBm0 (single tone), -3 dBm0 (dual tone) (E-1) Programmable, default set at -39 dBm0 to +0 dBm0 per tone

# Dialogic® D/240JCT-T1 Media Board and Dialogic® D/300JCT-E1 Media Board

## Global Tone Generation

Tone type	Generate single or dual tones
Frequency range	Programmable within 200 Hz to 4000 Hz
Frequency resolution	1 Hz
Duration	10 ms increments
Amplitude	(T-1) –43 dBm0 to –3 dBm0 per tone nominal, programmable (E-1) –40 dBm0 to +0 dBm0 per tone nominal, programmable

## MF Signaling (T-1)

MF digits	0 to 9, KP, ST, ST1, ST2, ST3 per Telcordia LSSGR Sec 6, TR-NWT-000506 and ITU-T Q.321
Transmit level	Complies with Telcordia LSSGR Sec 6, TR-NWT-000506
Signaling mechanism	Complies with Telcordia LSSGR Sec 6, TR-NWT-000506
Dynamic range for detection	–25 dBm0 to –3 dBm0 per tone
Acceptable twist	6 dB
Acceptable frequency variation	Less than ±1 Hz

## R1

## MF Signaling (E-1)

MF digits	All 15 forward and backward signal tones per ITU-T Q.441
Transmit level	–8 dBm0 per tone, nominal, per ITU-T Q.454; programmable
Signaling mechanism	Supports the R2 compelled signaling cycle and non-compelled pulse requirements per ITU-T Q.457 and Q.442
Dynamic range for detection	–35 dBm0 to –5 dBm0 per tone
Acceptable twist	6 dB
Acceptable frequency variation	Less than ±1 Hz

## R2

## Call Progress Analysis

Busy tone detection
Ring back tone detection
Positive voice detection
Positive answering machine detection
Fax/modem detection
Intercept detection
Dial tone detection before dialing

## Tone Dialing

DTMF digits	0 to 9, *, #, A, B, C, D per Telcordia LSSGR Sec 6, TR-NWT-000506
Frequency variation	Less than ±1 Hz
Rate	10 digits/s, configurable by parameter**
Level	–7.5 dBm0 per tone, nominal, configurable by parameter**

## Pulse Dialing

10 digits	0 to 9
Pulsing rate	10 pulses/s, nominal, configurable by parameter**
Break ratio	60% nominal, configurable by parameter**

## Analog Display Services Interface (ADSI)

FSK generation per Telcordia TR-NWT-000030
CAS tone generation and DTMF detection per Telcordia TR-NWT-001273

## Ordering Information

Please see the [Ordering Information](#) tab for this product



[www.dialogic.com](http://www.dialogic.com)

For a list of Dialogic locations and offices, please visit: <https://www.dialogic.com/contact.aspx>

Dialogic is a registered trademark of Dialogic Corporation and its affiliates or subsidiaries ("Dialogic"). Dialogic's trademarks may be used publicly only with permission from Dialogic. Such permission may only be granted by Dialogic's legal department at 6700 Cote-de-Liesse Road, Suite 100, Borough of Saint-Laurent, Montreal, Quebec, Canada H4T 2B5. The names of actual companies and products mentioned herein are the trademarks of their respective owners.

Dialogic encourages all users of its products to procure all necessary intellectual property licenses required to implement their concepts or applications, which licenses may vary from country to country. None of the information provided in this Datasheet other than what is listed under the section entitled Technical Specifications forms part of the specifications of the product and any benefits specified are not guaranteed. No licenses or warranties of any kind are provided under this datasheet.

Dialogic may make changes to specifications, product descriptions, and plans at any time, without notice.

Any use case(s) shown and/or described herein represent one or more examples of the various ways, scenarios or environments in which Dialogic® products can be used. Such use case(s) are non-limiting and do not represent recommendations of Dialogic as to whether or how to use Dialogic products.

**Positive Answering Machine Detection/Positive Voice Detection**

These performance results were measured using specific computer systems and/or components within specific lab environments and under specific system configurations. Any difference in system hardware, software design, or configuration may affect actual performance. The results are furnished for informational use only and should not be construed as a commitment by Dialogic. Dialogic assumes no responsibility or liability for any errors or inaccuracies.

**Outbound Dialing/Telemarketing**

Outbound dialing systems may be subject to certain laws or regulations. Dialogic makes no representation that Dialogic products will satisfy the requirements of any such laws or regulations (including, without limitation, any regulations dealing with telemarketing).

\*\*Configurable to meet country-specific PTT requirements. Actual specification may vary from country to country for approved products.